

PCM[™]+

PIPELINE CURRENT MAPPER





Fast locate and effective measurement of pipeline coating defects.

The location and measurement of pipeline corrosion using electromagnetic detection devices (Locators) are increasingly being linked with GIS systems and GPS information, to provide an accurate record of the condition of pipes and the position and time co-ordinates for post mapping analysis – this requirement is the basis of the PCM+.

As part of Radiodetection's commitment to protecting the environment the PCM+ enables the pipeline technician to carry out preventative maintenance on pipelines giving them a longer life and identifying corrosion at an earlier stage.

The PCM+ System consists of a portable transmitter and a hand held locator. The transmitter connected at the CPS station or test post, applies a special signal to the pipeline. The locator locates this unique signal at distances up to 30km (19 miles) identifying the position and depth of the pipe.

Once the pipe has been located the technician can map the leakage currents along the pipe in magnitude and direction allowing coating defects to be quickly identified.

Once the segment of pipeline where the defect lies has been identified, by using an A-frame, the defect position and depth can be further pinpointed to within 1 meter (3 feet).

The PCM+ using its powerful feature set including Automatic Signal Attenuation (ASA), accurately and easily locates and maps the pipeline even in areas where there is contact with other metallic structures, electrical interference, or congestion, providing simultaneous measurement of PCM current (ACCA) and Voltage Gradient (ACVG).

This eliminates the need for the operator to perform 'current spans' and manual calculations to determine CP currents along a pipeline that would usually require a direct connection.

Each time the PCM+ maps in any of the modes, as well as storing and displaying the information on the locator, all the data gathered can be sent via Bluetooth® to either a PC or an optional PDA (with GPS), and displayed in a number of graphical formats for fast analysis.

The PCM+ and its accessory equipment provide any pipeline technician with the latest in accurate, fast and reliable pipeline current mapping tools.

LOCATE

Accurately find buried pipes, establish centerline depth, then troubleshoot coating defects.

DATA UPLOAD

Bluetooth® link to PDA/PC for real time logging with GPS into Radiodetection Survey Application.

RECORD

Stores up to 1000 PCM and Location measurements in Flash memory.

PCM+ LOCATOR

The hand held locator unit is used to locate the pipeline, even in heavily congested areas such as conduits, and then provides the operator with a measurement of depth current strength and signal direction applied by the transmitter to quickly pinpoint corrosion related problems.

The locator makes the required calculations and instantaneously displays the results. This provides the operator with an improved method that accurately troubleshoots the CP system by pinpointing metallic contacts and locating areas of coating defects.




High contrast display

Multi-function tactile keypad

Weather sealed earphone and accessory ports

Choice of batteries:
2 x LR20 D Cells or
rechargeable equivalent



Saved locator data is uploaded in real time to a PDA or PC via Bluetooth® for GPS synchronization


Self orienting foot

PCM+ locator features:

- Precision locator and PCM in one unit.
- Unique features to improve data integrity:
 - ASA Maintains performance in strong magnetic fields such as Power sub-stations.
 - Depth of utility in Power Mode.
- Current mapping:
 - Quicker 3 second ACCA mapping.
 - Up to 1000 data records.
- Real time upload of mapped data via Bluetooth® to PDA or PC:
 - Integrates GPS data.
- Downloadable analysis software for PDA and PC:
 - Integrates with standard GIS software.
 - 5 key graph mapping modes including locate depth, current and phase.
- Low power for full day survey.
- Backlight / Real sound.
- Peak/Null:
 - Used to pinpoint target line.
 - Selectable peak & null response.
 - Gain control: Via keypad auto & manual.

PCM-Tx transmitter features:

- High power 150 Watt.
- 30km (19 miles) range @ 4Hz.

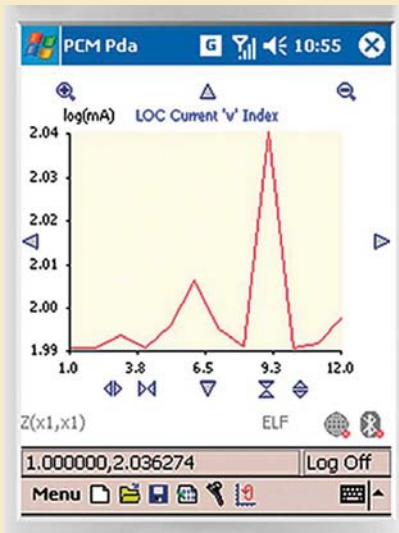

REAL TIME MAPPING ANALYSIS (PDA OR PC) USING RADIODETECTION SURVEY SOFTWARE

To provide faster analysis of mapped information, the PCM+ connects wirelessly with a PDA or PC, uploading all the information immediately and linking it with GPS into a database using the Radiodetection Survey software. The database is updated after each mapping and can be seen immediately on the PC or PDA in either a database or a choice of graphical formats. The information can then be imported into most of the standard post processing software programs available.

The Radiodetection Survey software incorporates GPS information and shows the mapped data in a variety of formats as well as allowing comparisons between new and old mapping surveys.

For more details go to www.radiodetection.com

UPLOAD

Saved locator data is uploaded in real time to a PDA or PC via Bluetooth® for GPS synchronization.

REVIEW

All uploaded data displayed in graphical format for immediate or post survey analysis.

HIGH POWER TRANSMITTER ENABLES 30KM (19 MILES) RANGE

Fewer connection points speeds up survey time over long distances.

INTERFERENCE REJECTION

DSP based algorithms enable filtering of false signals even in areas where there is contact with other metallic structures.



PCM-TX TRANSMITTER

The PCM+ system's specialized constant current high-power transmitter allows for long range signal detection of up to 30km (19 miles). Significantly fewer pipeline connection points are needed thereby reducing the time required to evaluate a section of pipeline.

The transmitter has three operating modes that enable both distribution and transmission pipeline systems to be effectively mapped.

Connecting the PCM+ is straightforward, and the transmitter's current reading display and power indicating LED's help the operator to choose the best settings for the specific pipeline application.

A-FRAME

The A-Frame is used with the PCM+ locator to precisely pinpoint coating defects and isolation faults. The PCM+ locator display indicates direction to the fault, using the CD arrows, and this makes fault position easy to locate. The PCM+ also displays the dB microvolts reading across the A-Frame spikes, and this allows a comparison to be made between different faults to determine the most severe. This numeric value is stored in the PCM's datalogging facility, and uploaded via Bluetooth® to a PDA or PC.



LOCATE | MEASURE | STORE | UPLOAD | REVIEW | ANALYZE



Technical specifications

| PCM+ LOCATOR | |
|-------------------------|--|
| Mapping Modes:* | |
| ELF | Extra Low Frequency 4Hz+128Hz/98Hz |
| LF | Low Frequency 640Hz/512Hz |
| 8kHz | Standard locate frequency from battery powered Radiodetection transmitters |
| Locate Modes: | |
| ⚡ | Detects 50Hz/60Hz from power cables |
| CPS | Detects 100Hz/120Hz ripple from CP transformer rectifier |
| 8kHz | Standard locate frequency from battery powered Radiodetection transmitters |
| Dynamic Range: | 140dB |
| Selectivity: | 120dB/Hz |
| Range from Transmitter: | 30km (19 miles) |
| Depth accuracy: | ± 5% to 3 meters (10ft) ± 7.5% to 5 meters (16.5ft) – in good conditions |
| Current accuracy: | ± 5% |
| Locate accuracy: | ±5% of depth |
| Weight: | 3.3kg (7.2lb) |
| Batteries: | 2 x LR20 D cells (Alkaline or NiMH) |
| Environmental: | IP54 |
| Approvals: | CE, Bluetooth® compliant |

*NB: Current Direction (FF) arrows are displayed only with the PCM measurement, and not in locate modes, unless the PCM is supplied with CD frequency.



PCM TX TRANSMITTER

Frequency Select

Current Direction (CD) provides a positive identification of the 'out-going' current and provides a method of locating pipe faults using the A-Frame.

The three position switch selects the following mapping frequencies:

| | |
|------|--|
| ELF | Maximum range for Current Logging 4Hz + 98Hz/128Hz |
| ELCD | Standard Current Logging with CD (4Hz + 8Hz) CD + 98/128Hz |
| LFCD | Improved depth, position and current logging accuracy with respect to ELCD. Shorter range operation (4Hz + 8Hz) CD + 512Hz/640Hz |

The 4Hz mapping frequency is always present and the current is shown on the LCD. The operator has a choice of selecting the locate frequency and current direction indication if required for identification in congested areas or for fault finding.

| | |
|--------------------|---|
| Case construction: | High impact engineered plastics |
| Weight: | 15.2kg (34lb) |
| Size: | 47 x 37 x 19cm (18.5 x 14.5 x 7.5 inch) |
| Environmental: | NEMA 3R and IP55 – lid open; NEMA 6 and IP67 – lid closed |
| Approvals: | CE |

Current Select

The six position (current select) rotary switch selects the following 4Hz current settings:

100mA, 300mA, 600mA, 1A, 2A, 3A. When the PCM Transmitter is in operation, the selected current will remain at a constant level, unless the input power supply limit is reached.

A-FRAME

A-frame for detection of sheath faults on buried pipes and cables (includes PCM+ connection cable).

| | |
|---------|---|
| Weight: | 1.55kg (3.4lb) |
| Size: | 8.5 x 59 x 4.5cm (33 x 39.3 x 1.7 inch) |



Global locations

USA

SPX Global Headquarters

13515 Ballantyne Corporate Place
Charlotte, NC 28277, USA
Tel: +1 704 752 4400
www.spx.com

Radiodetection

28 Tower Road, Raymond, Maine 04071, USA
Tel: +1 (207) 655 8525
Toll Free: +1 (877) 247 3797
Fax: +1 (207) 655 8535
Email: rd.sales.us@spx.com
www.radiodetection.com

Pearpoint

39-740 Garand Lane, Unit B
Palm Desert, CA 92211, USA
Tel: +1 800 688 8094
Tel: +1 760 343 7350
Fax: +1 760 343 7351
pearpoint.sales.us@spx.com
www.radiodetection.com

Radiodetection (Canada)

344 Edgeley Boulevard, Unit 34
Concord, Ontario L4K 4B7, Canada
Tel: +1 (905) 660 9995
Toll Free: +1 (800) 665 7953
Fax: +1 (905) 660 9579
rd.sales.ca@spx.com
www.radiodetection.com

EUROPE

Radiodetection Ltd. (UK)

Western Drive, Bristol BS14 0AF, UK
Tel: +44 (0) 117 976 7776
Fax: +44 (0) 117 976 7775
rd.sales.uk@spx.com
www.radiodetection.com

Radiodetection (France)

13 Grande Rue, 76220, Neuf Marché, France
Tel: +33 (0) 2 32 89 93 60
Fax: +33 (0) 2 35 90 95 58
rd.sales.fr@spx.com
<http://fr.radiodetection.com>

Radiodetection (Benelux)

Industriestraat 11
7041 GD 's-Heerenberg, Netherlands
Tel: +31 (0) 314 66 47 00
Fax: +31 (0) 314 66 41 30
rd.sales.nl@spx.com
<http://nl.radiodetection.com>

Radiodetection (Germany)

Groendahlscher Weg 118
46446 Emmerich am Rhein, Germany
Tel: +49 (0) 28 51 92 37 20
Fax: +49 (0) 28 51 92 37 520
rd.sales.de@spx.com
<http://de.radiodetection.com>

ASIA-PACIFIC

Radiodetection (Asia-Pacific)

Room 708, CC Wu Building
302-308 Hennessy Road, Wan Chai
Hong Kong SAR, China
Tel: +852 2110 8160
Fax: +852 2110 9681
rd.sales.cn@spx.com
www.radiodetection.com

Radiodetection (China)

Hongfu Mansion, Room 61622
Zheng Ge Zhuang, Bei Qi Jia Town
Chang Ping District
Beijing 102209, China
Tel: +86 (0) 10 8178 5652
Fax: +86 (0) 10 8178 5662
rd.service.cn@spx.com
<http://cn.radiodetection.com>

Radiodetection (Australia)

Unit H1, 101 Rookwood Road,
Yagoona NSW 2199, Australia
Tel: +61 (0) 2 9707 3222
Fax: +61 (0) 2 9707 3788
rd.sales.au@spx.com
www.radiodetection.com

Radiodetection is a leading global developer and supplier of test equipment used by utility companies to help install, protect and maintain their infrastructure networks.

Radiodetection is a unit of SPX (NYSE: SPW), a global Fortune 500 multi-industry manufacturing company. With headquarters in Charlotte, N.C., SPX has 15,000 employees in more than 35 countries worldwide. Visit www.spx.com.

© 2013 Radiodetection Ltd. – SPX Corporation. All rights reserved. Radiodetection is a subsidiary of SPX Corporation. SPX, the green ">" and "X" are trademarks of SPX Corporation, Inc. Radiodetection and PCM are trademarks of Radiodetection Ltd. The Bluetooth word, mark and logos are registered trademarks of Bluetooth Sig, Inc. and any use of such trademarks by Radiodetection is under license. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Radiodetection Ltd.