


Blind Flange Assembly

The Blind Flange Assembly is for the use of cathodic protection in code-rated vessels, located in areas that restrict the use of Victaulic connections on pressure rated vessels. The Blind Flange Assembly is recommended for use with a flange insulator to allow monitoring of anode current output. Standard size 4", 150 lb rating. Other sizes are available on request.

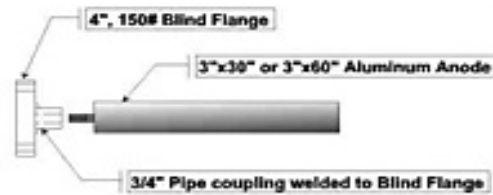

Size	Rating	Flange Size	Anode Size
4 in	150 lb	4" 150 lb	3 x 30 in 3 x 60 in