


GMC STAPERM™ PRODUCT CATALOG 2012

“Rust Never Sleeps”

STAPERM™ Model Zn-4-UG Zinc-Zinc Sulfate (Zn-ZnSO₄)

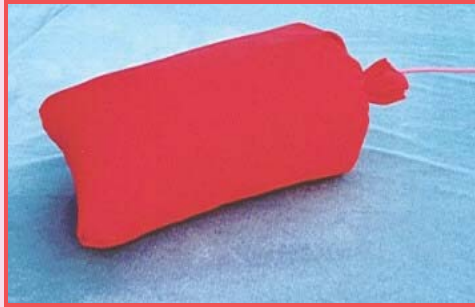

- ❑ **Size:** 2" dia. x 7" long high impact ABS plastic tube.
- ❑ **Packaging:** Special non-polarizing backfilled in red cotton bag
- ❑ **Overall size:** Approx. 6" dia. x 14" long.
- ❑ **Weight:** Approx. 15 lbs
- ❑ **Special sizes:** Upon request.
- ❑ **Reinforcing Rods:** 1/4" x 3" PVC at electrode end
- ❑ **Lead Wire:** Standard 50' of #14 RHH-RHW. *Add \$0.29/ft. for extra lead length
- ❑ **Design Life:** 30 years.
- ❑ **Stability:** +/- 5 millivolts with 3.0 microamp load.
- ❑ **Temperature Range:** 32°F to 150°F

STAPERM™ Model AG-4-UG Silver-Silver Chloride (Ag-AgCl)



- ❑ **Size:** 2" dia. x 7" long high impact ABS plastic tube.
- ❑ **Packaging:** Special non-polarizing backfilled in blue cotton bag
- ❑ **Overall size:** Approx. 6" dia. x 14" long.
- ❑ **Weight:** Approx. 15 lbs
- ❑ **Special sizes:** Upon request.
- ❑ **Reinforcing Rods:** 1/4" x 3" PVC at electrode end
- ❑ **Lead Wire:** Standard 50' of #14 RHH-RHW. *Add \$0.29/ft. for extra lead length
- ❑ **Design Life:** 30 years.
- ❑ **Stability:** +/- 5 millivolts with 3.0 microamp load.
- ❑ **Temperature Range:** 32°F to 150°F



GMC ELECTRICAL INC

2027 E. Cedar, Ontario, CA 91761 USA

Office: 909-947-6016 - Fax number: (909) 947-9430

web: www.gmcelectrical.net E-mail address: sales@gmcelectrical.net