


Polyken® Pipeline Coatings

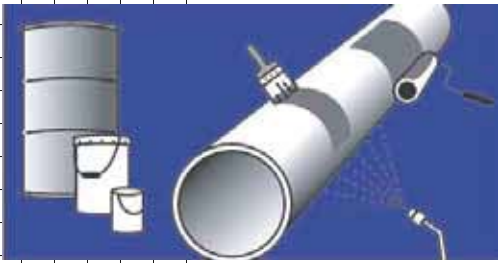

POLYKEN® Liquid Adhesive Systems #1027

Basic Use

Polyken liquid adhesive systems are recommended for use with only Polyken coating systems. The liquid adhesive systems consist of butyl based elastomers blended with polymeric resins dissolved in an organic solvent system. They can be used for machine or hand brush applications and provide excellent adhesion to the pipe substrate and cathodic disbondment resistance.

Polyken # 1027

Liquid adhesive system is ideal for hand brush application to rough, reconditioned, or grit-blasted pipe surfaces. It provides a uniformly smooth, instant tack surface for Polyken coating systems.

CAUTION:

- Store away from heat source. Read all label instructions prior to use.
- Properly stored, all Polyken liquid coating systems have a shelf life of 3 years. Please request an application specification and storage guideline from Berry Plastics.
- Polyken liquid adhesive systems are FLAMMABLE MIXTURES

System Components

Description	# 1027
Base	Rubber/Resins
Solvent	V.M. & P Naptha
Total Solids	30%
Weight/Gallon	7.1 lb
Weight/Liter	0.825 kg
Viscosity	Medium Syrup
Flash Point	4°C (40°F)
Color	Black
VOC	0.59 kg/l (4.9 lbs/gal)
Maximum operating temperature	85°C (185°F)

* Contact a Berry Plastics representative for specific project requirements

BERRY
PLASTICS
CORPORATION
AND SUBSIDIARIES
CORROSION PROTECTION GROUP
www.berrycpg.com

The leading global partner in protecting the integrity of critical infrastructure.

Berry Plastics warrants that the product(s) represented within conform(s) to its/their chemical and physical description and is appropriate for the use as stated on the respective technical data sheet when used in compliance with Berry Plastics' written instructions. Since many installation factors are beyond the control of Berry Plastics, the user is obligated to determine the suitability of the products for the intended use and assume all risks and liabilities in connection herewith. Berry Plastics' liability is stated in the standard terms and conditions of sale. Berry Plastics makes no other warranty either expressed or implied. All information contained in the respective technical data sheet(s) should be used as a guide and is subject to change without notice. This document supersedes all previous revisions. Please see revision date on the right.

Local Distributor / Representative:
MESA PRODUCTS
4445 S. 74th E. Ave.
Tulsa, OK 74145
Phone: 888-800-MESA
For contact details of local Distributors / Representatives
Please visit www.berrycpg.com.

Headquarters
Franklin, MA, USA
Tel: +1 508 918 1714
US Toll Free: +1 800 248 0149
Fax: +1 508 918 1910
CPG@berrypastics.com

Houston, TX, USA
Tel: +1 713 676 0085
US Toll Free: +1 888 676 7202
Fax: +1 713 676 0086
CPGH@berrypastics.com

Tijuana, Mexico
Tel USA +1 858 633 9797
Fax US: +1 858 633 9740
Tel Mexico: +52 664 647 4397
Fax Mexico: +52 664 607 9105
CPGTJ@berrypastics.com

Westerlo, Belgium
Tel. +32 14 722500
Fax +32 14 722570
CPGE@berrypastics.com

Baroda, India
Tel: +91 2667 264721
Fax: +91 2667 264724
CPGIN@berrypastics.com